




**FIRE - SINGLE JACKET**

YELLOW NITRILE COVERED  
PERMALINE - 500# Test

**FEATURES & APPLICATIONS:**

- This covered hose is a premium quality, abrasion resistant, chemical resistant, lightweight industrial fire hose. The one-piece cover/lining totally encompasses the synthetic reinforcement providing a industrial fire hose that is easy to use, clean and maintain. This hose is totally immune to mildew & resists the effects of most chemicals. Recommended 225 psi working pressure.

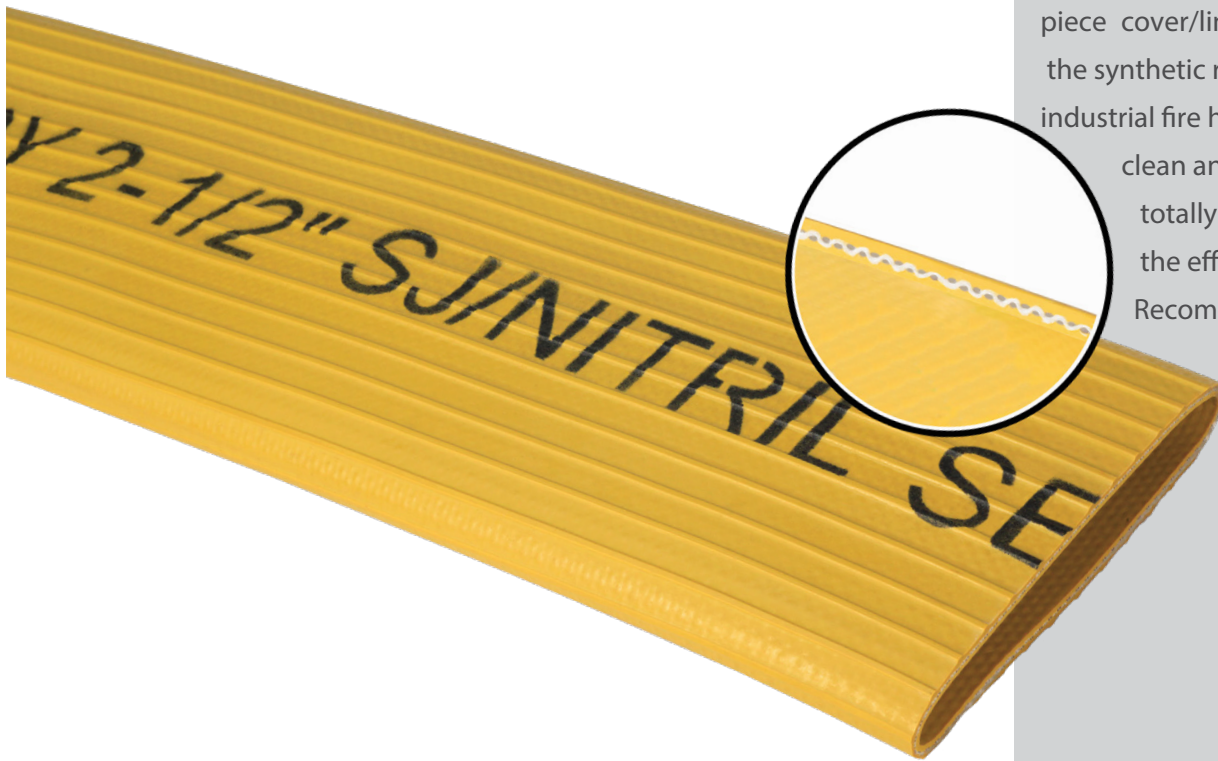

**TECHNICAL DATA:**

- **Temp Range:** -4° F to +174° F
- **Cover:** Yellow, Nitrile
- **Tube:** Nitrile
- **Reinforcement:** n/a
- **Safety Factor:** n/a
- **Branding:**

**NOTES:**

- Maximum advised operating/working pressure that should not exceed 90% of Service Test Pressure (Stenciled on hose)

**NITRILE - YELLOW**

ID	OD	Length	Working Pressure	Service Test Pressure	Bend Radius	Lbs per Roll	Bowl Size	Part #
1-1/2"	n/a	50'/100'	225	250	n/a	11/21	1-3/4"	PERMALINE150Y / PERMALINE150Y 100
2-1/2"	n/a	50'	225	250	n/a	20	2-13/16"	PERMALINE250Y



Information contained on this page is for general information purposes only. Seal Fast Inc. assumes no responsibility for errors or omissions for this product.