



SEALFAST
THE SIMPLE SOLUTION

HOSES
FIRE




FIRE

FIRE - SINGLE JACKET

EPDM LINED - 500# Test

FEATURES & APPLICATIONS:

- Single Jacket with a high-grade single ply extruded EPDM liner. This hose is totally immune to the effects of mildew. It is designed for emergency fire protection with water pressure not exceeding 225 psi working pressure. 100% Polyester Cover.

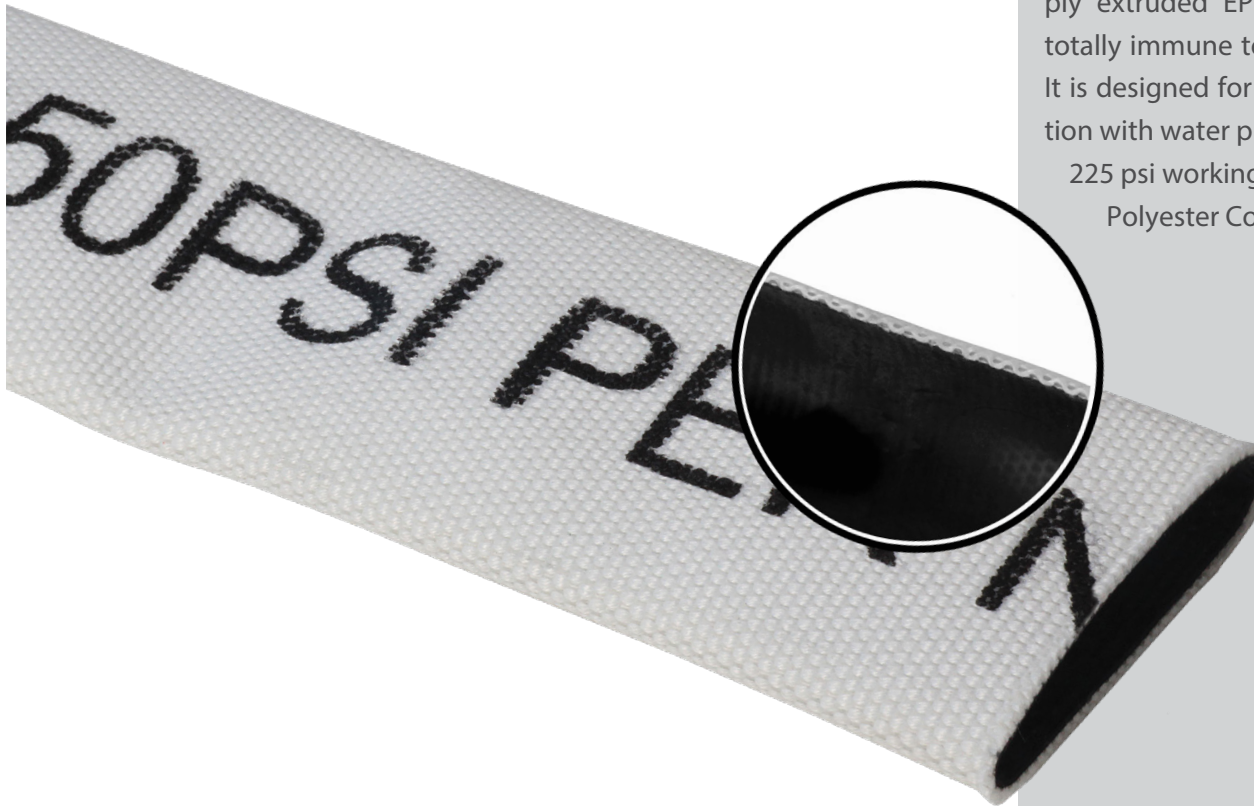

TECHNICAL DATA:

- **Temp Range:** -22° F to +158° F
- **Cover:** Single Jacket White Polyester
- **Tube:** EPDM
- **Safety Factor:** n/a
- **Branding:**

NOTES:

- Maximum advised operating/working pressure that should not exceed 90% of Service Test Pressure (Stenciled on hose) 250 psi

*Service Test Pressure are 1/2 of Acceptance Test Pressure Per NFPA 1962

POLYESTER-EPDM LINED

ID	OD	Length	Working Pressure	Service Test Pressure	Bend Radius	Lbs per Roll	Bowl Size	Part #
1-1/2"	n/a	50'/75'/100'	225	250	n/a	13/20/26	1-3/4"	80-083 / 80-083 75 / 80-083 100
2"	n/a	50'/100'	225	250	n/a	19/28	2-5/16"	80-084 / 80-084 100
2-1/2"	n/a	50'/75'/100'	225	250	n/a	25/38/52	2-13/16"	80-085 / 80-085 75 / 80-085 100



Information contained on this page is for general information purposes only. Seal Fast Inc. assumes no responsibility for errors or omissions for this product.