




## FIRE - DOUBLE JACKET

EPDM LINED - 800# Test

### FEATURES & APPLICATIONS:

- The ultimate in industrial fire protection, this hose is manufactured to exacting municipal requirements. The jackets are woven from the finest high tensile. 100% polyester yarn, w/Complete filler coverage of both jackets. The compact weave insures flexibility & strength; provides protection against wear from abrasion. It does not require drying after use & is completely immune to mildew & rot.

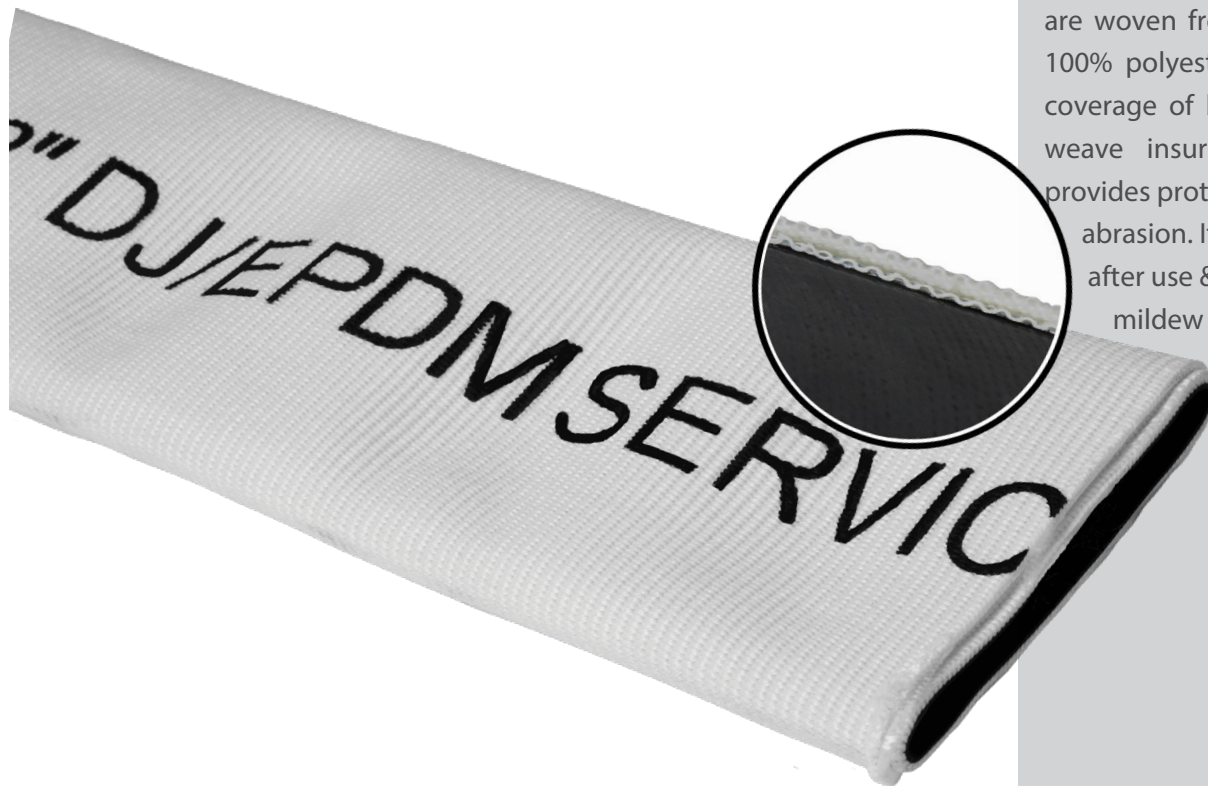

### TECHNICAL DATA:

- **Temp Range:** -22° F to +158° F
- **Cover:** Double Jacket White Polyester
- **Tube:** EPDM
- **Safety Factor:** n/a
- **Branding:**

### NOTES:

- Maximum advised operating/working pressure that should not exceed 90% of Service Test Pressure (Stenciled on hose)

### POLYESTER-EPDM LINED

ID	OD	Length	Working Pressure	Service Test Pressure	Bend Radius	Lbs per Roll	Bowl Size	Part #
1-1/2"	n/a	50'/100'	270	400	n/a	17/33	1-15/16"	80-004 / 80-004 100
2-1/2"	n/a	50'/100'	270	400	n/a	29/57	3"	80-131 / 80-131 100



Information contained on this page is for general information purposes only. Seal Fast Inc. assumes no responsibility for errors or omissions for this product.