



COMBINATION NIPPLES

MALE NPT - ALUMINUM

FEATURES & APPLICATIONS:

• **General Uses:**

Working pressures may vary with type and clamping system used to install couplings.

Combination Nipples are recommended for low pressure discharge and suction service for compatible liquids. NOT for compressible products such as Air, Nitrogen and Steam.

*All blank end & grooved combination nipples are made using Schedule 40 pipe.

Seal Fast Crimp Combination Nipples are to be used with Seal Fast Ferrules and Crimp Sleeves. They are designed with an Interlock System which allows the Ferrule to be permanently attached to the coupling.

WORKING PRESSURE 200 PSI




ALUMINUM

ALUMINUM

SIZE	
1/2"	SF050A
3/4"	SF075A
1"	SF100A
1-1/4"	SF125A
1-1/2"	SF150A
2"	SF200A
2-1/2"	SF250A
3"	SF300A
4"	SF400A
5"	SF500A
6"	SF600A



Information contained on this page is for general information purposes only. Seal Fast Inc. assumes no responsibility for errors or omissions for this product.

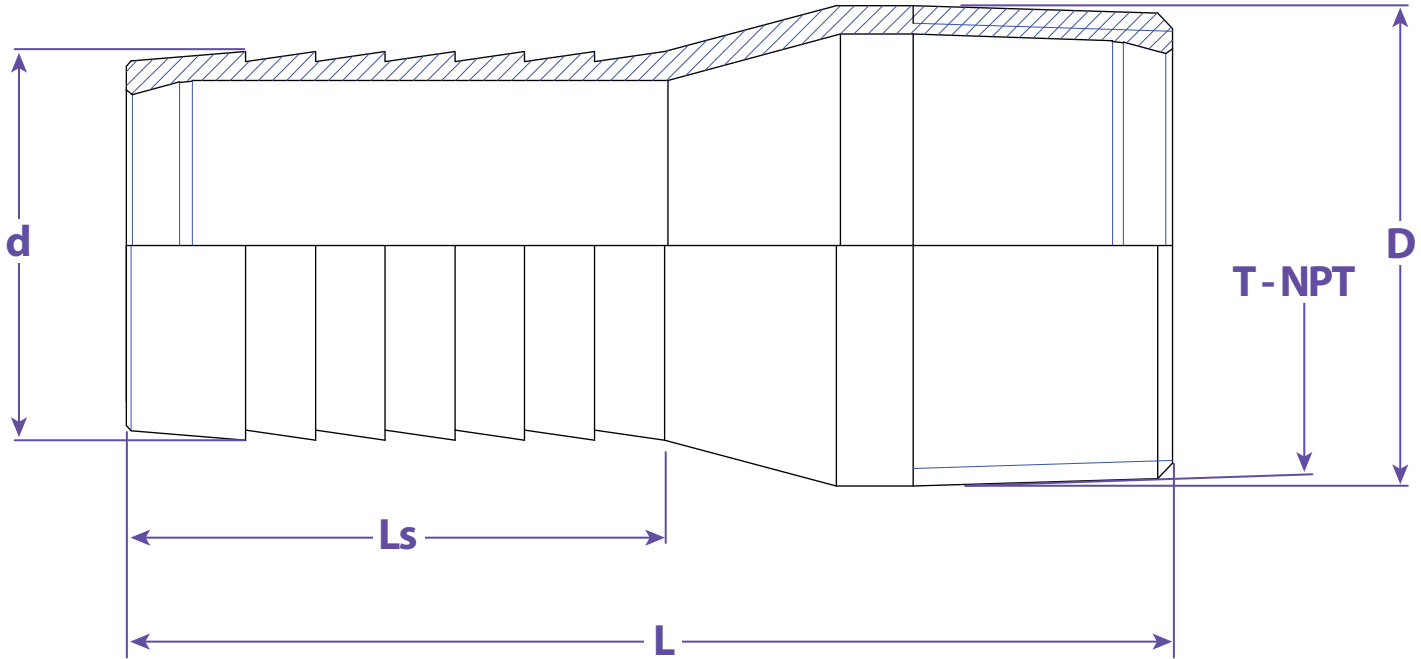

Dimensions					
T	L	Ls	D	d	Part #
3/4"	3.1102	1.5748	1.0512	0.7795	SF075A
1"	3.3071	1.5748	1.3154	1.0354	SF100A
1-1/4"	3.9370	1.8504	1.2992	1.2992	SF125A
1-1/2"	4.1339	2.1260	1.5354	1.5354	SF150A
2"	4.7244	2.4803	2.0315	2.0315	SF200A
2-1/2"	5.5906	2.8937	2.5315	2.5315	SF250A
3"	6.0236	3.3858	3.0315	3.0315	SF300A
4"	7.0472	3.6220	4.0315	4.0315	SF400A
5"	8.8583	5.4331	5.0315	5.0315	SF500A
6"	10.9055	6.4567	6.0472	6.0472	SF600A

TITLE COMBINATION NIPPLES FOR STRAIGHT & HOSE - NPT THREAD

DISCLAIMER
All drawings and specifications are subject to change without notice. Drawings represent general dimensions of our products. Seal Fast cannot guarantee the dimensions of the part will exactly match those in the drawing. This drawing is the property of Seal Fast Inc. Copying or reproduction of this drawing is expressly prohibited.

MATERIAL
Aluminum

DRAWING NOT TO SCALE

PART # SF...A

