




WATER

GODZILLA 20

NITRILE 20

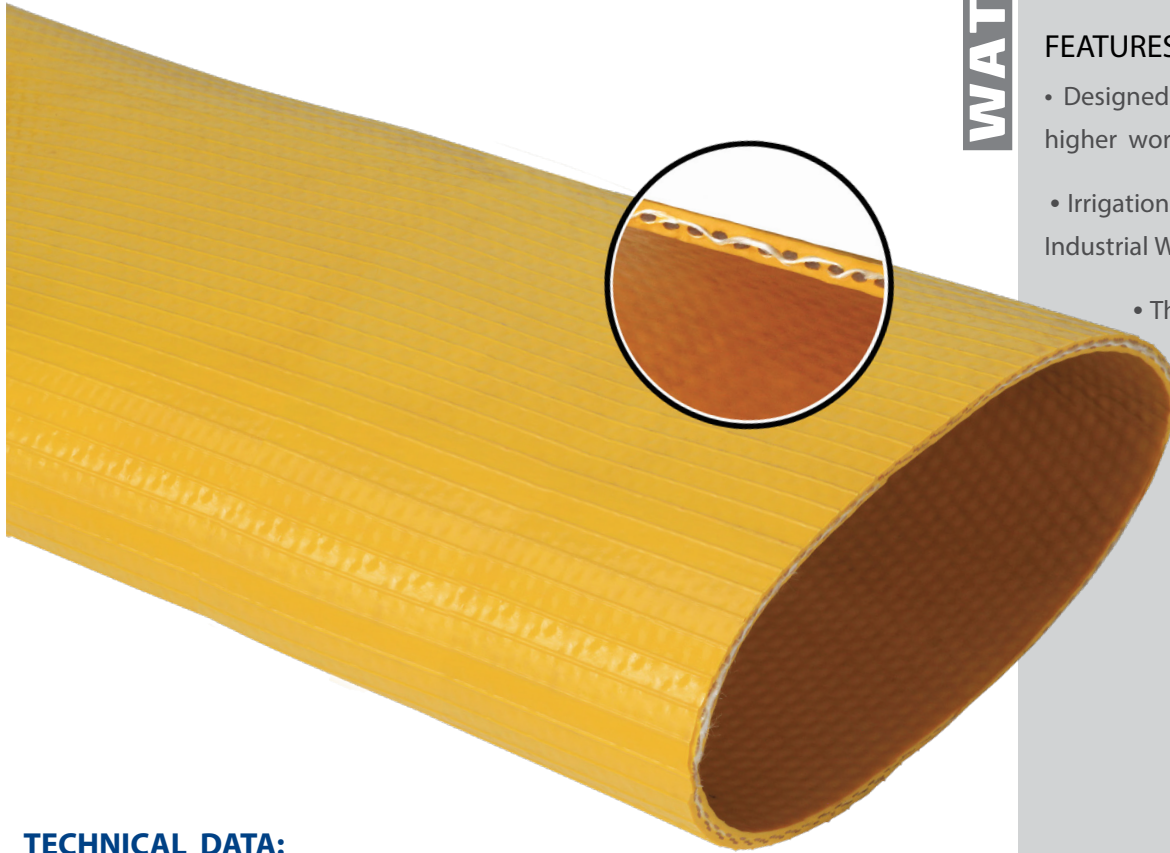

FEATURES & APPLICATIONS:

- Designed for the delivery of fluids, where higher working pressures are required.
- Irrigation - Agriculture - Pump Dis-charge - Industrial Wash Down
- Through the Weave Technology
- 70% PVC / 30% NBR

TECHNICAL DATA:

- **Temp Range:** -4° F to +176° F
- **Cover:** Ribbed, highly resistant to oil, abrasion and weathering
- **Tube:** Nitrile-PVC oil/weather resistant rubber, polyester reinforcement
- **Reinforcement:** n/a
- **Safety Factor:** 3:1 min
- **Branding:**

YELLOW NITRILE 10

ID	OD	Length	Working Pressure	Burst Pressure	Bend Radius	lbs per ft.	Vacuum Rating "HG"	Part #
3/4"	.08"	200'	200	600	n/a	---	n/a	NITRIL 20075TW
1"	.08"	200'	200	600	n/a	---	n/a	NITRIL 20100TW
1-1/2"	.10"	200'	200	600	n/a	0.22	n/a	NITRIL 20150TW
2"	.10"	200'	200	600	n/a	0.40	n/a	NITRIL 20200TW
2-1/2"	.10"	200'	200	600	n/a	0.56	n/a	NITRIL 20250TW
3"	.11"	200'	200	600	n/a	0.64	n/a	NITRIL 20300TW
4"	.12"	200'	200	600	n/a	0.91	n/a	NITRIL 20400TW
6"	.12"	200'	200	600	n/a	0.91	n/a	NITRIL 20600TW



Information contained on this page is for general information purposes only. Seal Fast Inc. assumes no responsibility for errors or omissions for this product.