




PETROLEUM

CRUDE OIL SUCTION
"FRAC HOSE"

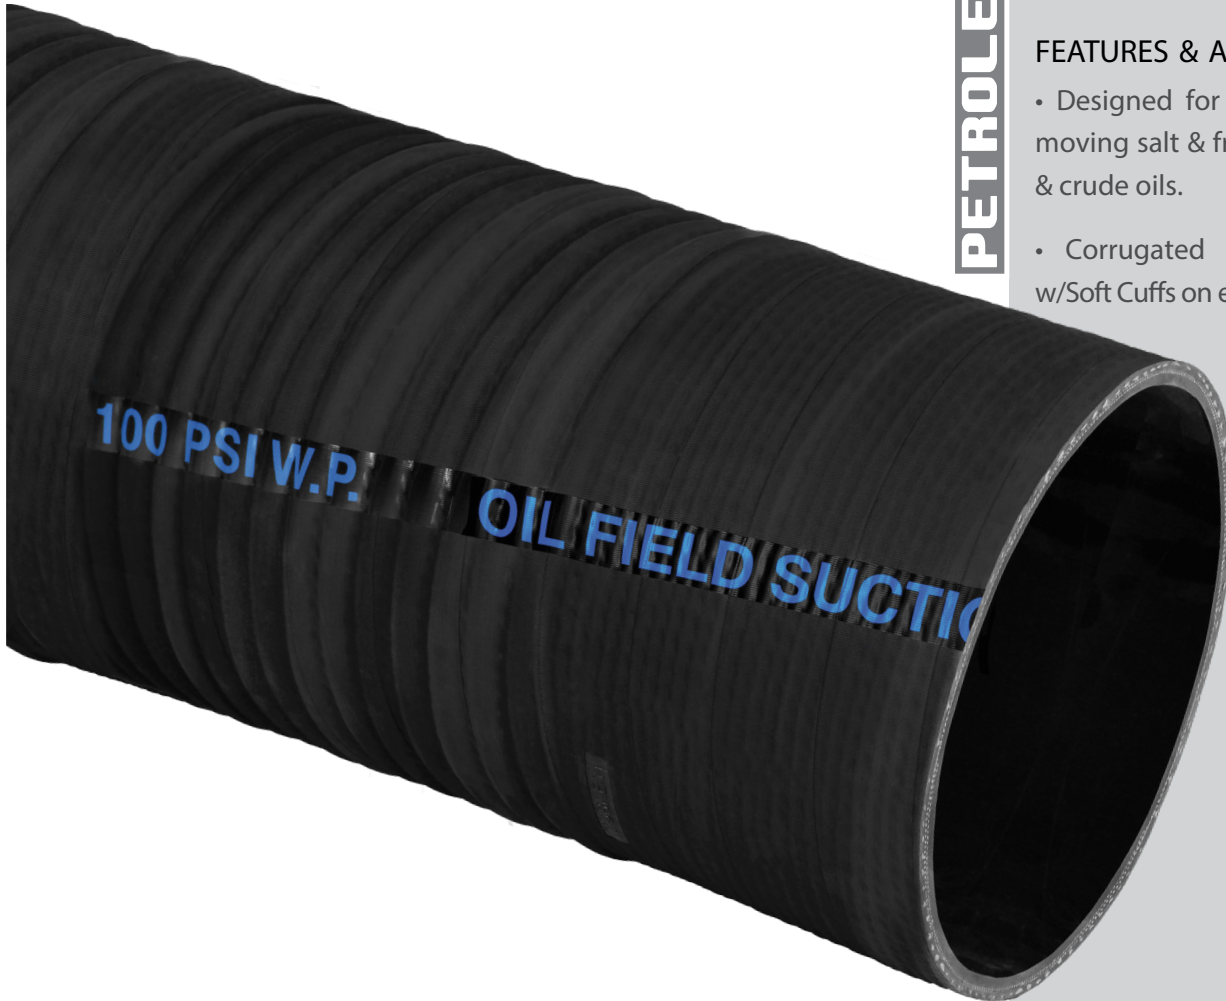

FEATURES & APPLICATIONS:

- Designed for use as a frac-tank hose moving salt & fresh water, drilling muds, & crude oils.
- Corrugated for increased flexibility w/Soft Cuffs on each end for easy coupling.

TECHNICAL DATA:

- **Temp Range:** -22° F to +212° F
- **Cover:** Black, CR/NBR
- **Tube:** CR/NBR
- **Reinforcement:** High tensile textile fabric; steel wire helix; anti-static copper wire
- **Safety Factor:** 3:1 min
- **Branding:**

NOTES:

- Recommended for CRUDE OIL ONLY.
- *NOT RECOMMENDED FOR REFINED PETROLEUM PRODUCTS.



NITRILE BLEND

ID	OD	Length	Working Pressure	Burst Pressure	Bend Radius	lbs per ft.	Part #
8"	8.66"	40'	100	300	35"	.79	COS 800 40
	8.66"	48'	100	300	35"	.93	COS 800 48
	8.66"	60'	100	300	35"	1.39	COS 800 60

Information contained on this page is for general information purposes only. Seal Fast Inc. assumes no responsibility for errors or omissions for this product.