




MILL - DOUBLE JACKET
PVC / NBR LINED



FEATURES & APPLICATIONS:

- All synthetic, lightweight PVC / NBR (plastic/rubber) lined general purpose hose designed for open end discharge and wash down. This hose is totally immune to the effects of mildew and requires no drying.

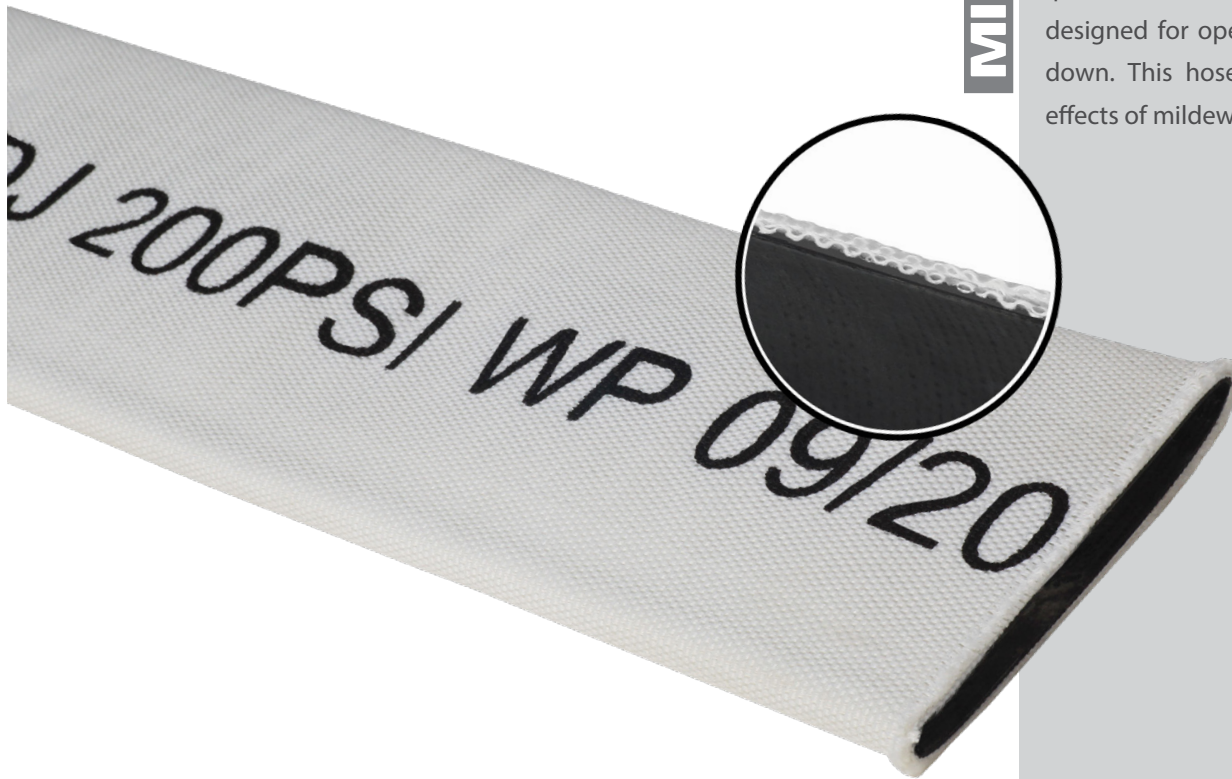

TECHNICAL DATA:

- **Temp Range:** -22° F to +158° F
- **Cover:** Double Jacket White Polyester
- **Tube:** PVC/NBR
- **Safety Factor:** n/a
- **Branding:**

NOTES:

- Made over sized to accommodate shank couplings.
- Not intended for use as Firehose

POLYESTER-PVC/NBR LINED

ID	OD	Length	Working Pressure	Burst Pressure	Bend Radius	Lbs per Roll	Vacuum Rating "HG"	Part #
1-1/2"	n/a	50'/100'	220	750	n/a	11/22	n/a	80-150DJPN / 80-150DJPN 100
2"	n/a	50'/100'	220	750	n/a	17/34	n/a	80-200DJPN / 80-200DJPN 100
2-1/2"	n/a	50'/100'	220	750	n/a	20/40	n/a	80-250DJPN / 80-250DJPN 100

Information contained on this page is for general information purposes only. Seal Fast Inc. assumes no responsibility for errors or omissions for this product.