




**WATER**

PVC SUCTION - (clear)

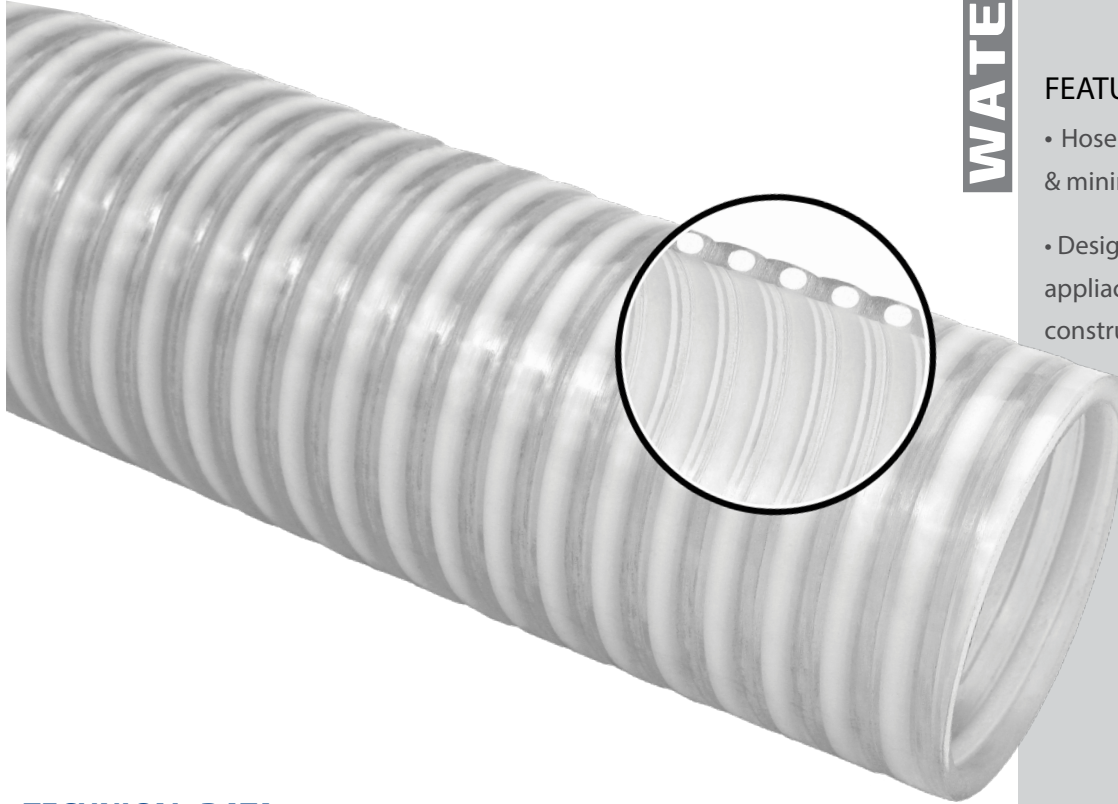

**FEATURES & APPLICATIONS:**

- Hose for agriculture, construction, industry & mining.
- Designed to meet almost all water hose applications, especially designed for use in construction, mining, industrial, & agricultural service. It is flexible & withstands high vacuum.

**TECHNICAL DATA:**

- **Temp Range:** -5° F to +104° F
- **Cover:** Clear PVC
- **Tube:** Clear PVC
- **Reinforcement:** Rigid White PVC Helix
- **Safety Factor:** 3:1 min
- **Branding:**

**CLEAR PVC**

ID	OD	Length	Working Pressure	Burst Pressure	Bend Radius	lbs per 100 ft.	Vacuum Rating "HG"	Part #
3/4"	1.00"	100'	100	n/a	3"	20	29	CL 075
1"	1.22"	100'	100	n/a	3"	25	29	CL 100
1-1/4"	1.50"	100'	90	n/a	4"	33	29	CL 125
1-1/2"	1.79"	100'	85	n/a	5"	37	29	CL 150
2"	2.30"	100'	85	n/a	7"	55	29	CL 200
2-1/2"	2.90"	100'	85	n/a	8"	80	29	CL 250
3"	3.40"	100'	75	n/a	10"	90	29	CL 300
4"	4.40"	100'	65	n/a	15"	159	29	CL 400
6"	6.50"	25'/100'	45	n/a	25"	320	29	CL 600
8"	8.60"	20'	35	n/a	33"	507	28	CL 800

Information contained on this page is for general information purposes only. Seal Fast Inc. assumes no responsibility for errors or omissions for this product.